

ELECTROMAGNETIC LOCK SERIES & BRACKETS




Single Door Magnetic Lock with Waterproof

Size: 250L×42W×25H (mm)
Holding Force: 280kg (600Lbs)
Current Draw: 480mA at 12VDC
240mA at 24VDC

Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door

Feature: Fail safe
Weight: 2KG




Single Door Magnetic Lock with Signal & LED

Size: 265L×71W×40H (mm)
Holding Force: 600kg (1200Lbs)
Current Draw: 600mA at 12VDC
300mA at 24VDC

Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door

Feature: Fail safe
Weight: 4.5KG




Single Door Magnetic Lock with Waterproof

Size: 265L×66W×40H (mm)
Holding Force: 600kg (1200Lbs)
Current Draw: 600mA at 12VDC
300mA at 24VDC

Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door

Feature: Fail safe
Weight: 4.5KG




Double Door Magnetic Lock with Signal & LED

Size: 530L×71W×40H (mm)
Holding Force: 600kg×2 (1200Lbs×2)
Current Draw: 600mA at 12VDC
300mA at 24VDC

Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door

Feature: Fail safe
Weight: 9.2KG




U bracket for Frameless Glass Door(280kg/600Lbs)

Size: 180L×41W×28H (mm)
Suitable for: Glass Door
Glass Thickness: 8-15mm
Open Mode: 90 degree door
Weight: 0.3KG




ELECTROMAGNETIC LOCK SERIES & BRACKETS

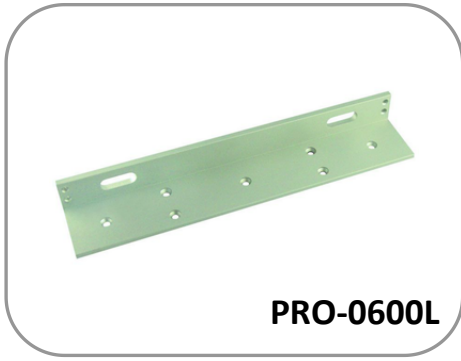

L bracket for Magnetic Lock (280kg/600Lbs)

Size: 250L×47W×28H(mm)
Suitable for: Inward Door

Wooden Door
Metal Door
Narrow Door
Open Mode: 90 degree door
Weight: 0.25KG




ZL bracket for Magnetic Lock (280kg/600Lbs)

Size: Z:180L×50W×50H (mm)

L:250L×47W×28H (mm)
Suitable for: Inward Door

Wooden Door
Metal Door
Narrow Door
Open Mode: 90 degree door
Weight: 0.7KG



ELECTRIC STRIKE & BOLTLOCKSERIES & BRACKETS




PRO-STL01

Electric strike

Size: 150L×38W×33H (mm)
Voltage: 12V DC
Current: Start 250mA

Standby 200mA
Suitable for: Wooden Door
metal Door
Feature: Fail secure
Weight: 0.4KG




PRO-STL02

Electric strike

Size: 150L×38W×33H (mm)
Voltage: 12V DC
Current: Start 250mA


Standby 200mA
Suitable for: Wooden Door
metal Door
Feature: Fail safe
Weight: 0.4KG



PRO-STL100

Electric Lock for Small Cabinet

Lock Size: 55L×43W×28H (mm)
Voltage: 12V DC
Current: 900mA
Suitable for: Small cabinet
Feature: Fail Secure
Weight: 0.2KG




PRO-STL200

Shear Lock with Signal

Lock Size: 266L×30W×34H (mm)
Armature plate: 266L×30W×34H(mm)
Shear force: 2600lbs (1200kg)
Voltage: DC 12V---24V
Current: Start 1000-1800mA

Standby 150-350mA
Feature: Fail safe
Weight: 1.7KG




PRO-EBL04MK

Fail Secure Electric Drop Bolt Locks with Cylinder

Lock Size: 260L×30W×65H (mm)
Voltage: DC 12V
Current: Start 900mA
Time Delay: 0,3,6,9sec
Signal Output: NO NC COM
Suitable for: Wooden Door

Glass Door
Metal Door
Fireproof Door
Feature: Fail secure
Weight: 1.2KG



ELECTRIC STRIKE & BOLTLOCKSERIES & BRACKETS





PRO-EBL4

Fail Safe Electric Bolt W/ Signal& Time Delay

Size: 205L×35W×42H (mm)
Voltage: 12V DC
Current: Start 900mA, Standby 100mA
Suitable for: Wooden Door

Glass Door
Metal Door
Fireproof Door

Feature: Fail Safe
Signal Output: NC COM
Time Delay: 0,3,6,9sec
Weight: 0.7KG

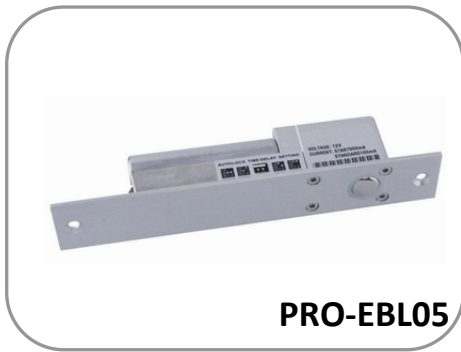


PRO-EBL05

Multifunctional Electric Bolt W/ Signal& Time Delay

Size: 205L×35W×42H (mm)
Voltage: 12V DC
Current: Start 900mA, Standby 100mA
Suitable for: Wooden Door

Glass Door
Metal Door
Fireproof Door

Feature: Fail Safe, Telecontrol
Signal Output: NC COM
Time Delay: 0,3,6,9sec
Weight: 0.7KG




PRO-EBL08

Enhanced Multi-function Electric Bolt W/ Signal& Time Delay

Size: 205L×35W×42H (mm)
Voltage: 12V DC
Current: Start 900mA, Standby 100mA
Suitable for: Wooden Door

Glass Door
Metal Door
Fireproof Door

Feature: Fail Safe, Telecontrol
Signal Output: Door states Output, NC COM
Lock states Output NC NO COM
Time Delay: 0,3,6,9sec
Weight: 0.7KG




PRO-LBB4

Stainless Steel Bracket for Frameless Glass Door

Size: 95L×48W×38H(mm)
Used with: PRO-EBL04MK

PRO-EBL04
PRO-EBL05
PRO-EBL08

Glass Thickness: 8-15mm
Suitable for: Glass Door
Opening Mode: 180 degree swing door
Weight: 0.3KG




PRO-UBB4

Stainless Steel Bracket for Fully Frameless Glass Door


Size: 210L×58W×46H (mm)
Used with: PRO-EBL04

PRO-EBL05
PRO-EBL08

Glass Thickness: 8-15mm
Suitable for: Glass Door
Opening Mode: 180 degree swing door
Weight: 0.8KG (upper)
0.9KG (downr)




SWITCH & PUSH BUTTONS SERIES

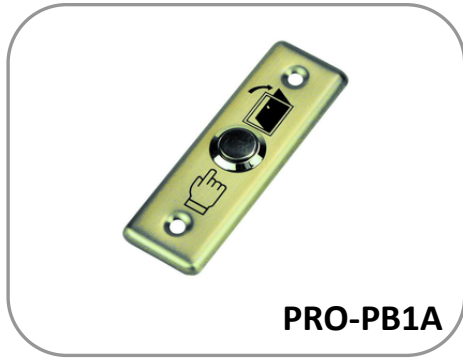

PRO-PB1A

Door Release Button (Stainless steel)


Size: 90L×29W×24H (mm)
Signal Output: NC COM
Suitable for: Hollow Frame
Mechanical life: 500,000 times
Weight:0.03KG



PRO-PB2A

Door Release Button (Stainless steel)


Size: 90L×90W×30H (mm)
Signal Output: NC COM
Suitable for: Hollow Frame
Mechanical life: 500,000 times
Weight:0.06KG



PRO-PB5A

Door Release Button (Plastic)

Size: 86L×86W×38H (mm)
Signal Output: NO COM
Feature: Fail Safe
Mechanical life: 500,000 times
Weight: 0.06KG





PRO-PTE300

Infrared Exit

Size: 115L×70W×29H (mm)
Voltage: 12V DC
Signal Output: NO COM
Feature: Fail Safe
Suitable for: Entrance

Exit
Automation Control System
Mechanical life: 500,000 times
Weight: 0.1KG

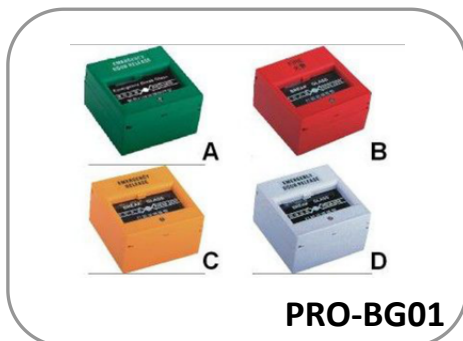


PRO-BG01

Break Glass Call Point

Size: 86L×86W×50H (mm)
Material: Fireproof
Suitable for: Entrance

Exit
Escape Vent
Output Contact: NC COM
Color: A:Green B:Orange
C:Red D:White
Weight:0.15KG



SWITCH & PUSH BUTTONS SERIES



Door Release Key Switch (Stainless steel)

Size: 90L×90W×30H (mm)
Signal Output: NC COM
Feature: Fail Safe
Mechanical life: 500,000 times
Weight:0.1KG

