




BioSense-A Specifications

Software Application	SoMac
Verification Mode	Fingerprint/Card (Not support Keypad)
Template Capacity	3,000
Sensor Type	Optical
Resolution	500dpi
Sensing Area	16 x 19mm
Template Size	256~384 Bytes
Image Size	272 x 320 (pixel)
1:1 Verification time	<600msec
1:1,000 Identification time	<760msec
Card Capacity	20,000
Communications	TCP/IP, Wiegand/RS485
DIO Support	DI: 3/DO: 1
Inbuilt Relays (Max. power loading)	Door Lock (40VAC/40VDC,2A)
System Log	1,536 entries
Entry Log	51,968 entries
Time Zone/Time Set/Group	255/120/255 Sets
Holiday	Yes
Remote Control/Event Handle	Yes/Yes
Fast Registry	Yes
Function Key(Auto)	400 (set BF-670W as Controller)
Anti-Pass Back	Yes
Power Consumption	500mA ± 5%
Power Requirement	9~24VDC/1A
Operation Temperature	0°C~65°C
Operation Humidity	5%~80% RH
Dimension/Weight	160 x 56.9 x 40.1mm/150g

Fingerprint Access Control

BioSense-A

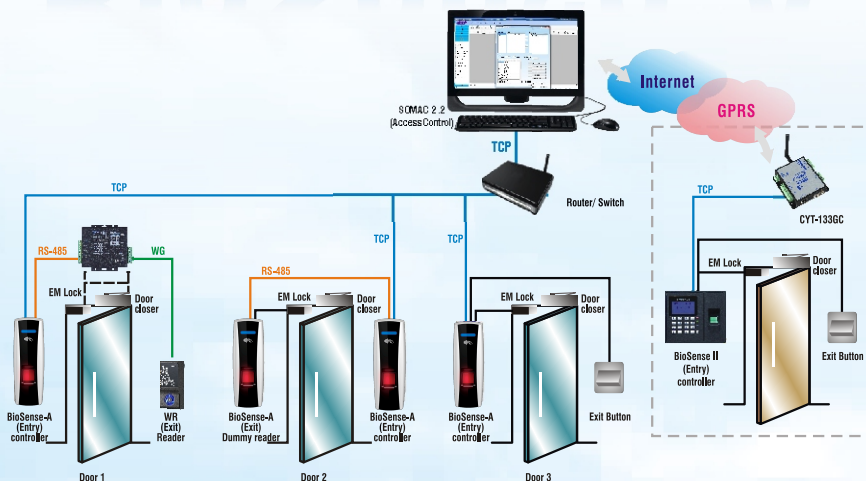

Terminal selection

Service Module	Access Control	Time Attendance	Lift Control	Zone Management	
Terminal Selection	Card / Pin	SEMAC-S2 /S1 WEBPASS BF Mini-W	BF-831W BF Mini-W	SEMAC-S3	SEMAC-S2 /S1 WEBPASS BF-831W BF Mini-W
	FP / Card / Pin	BioSense-A	—	—	BioSense-A

SoMac 2.2 software service modules

Access Control

Hybrid identification
Software & Hardware & Firmware
3 in 1 support
Single door to Multi-door
IP Camera & DVR integration

Zone Management

Access statement to zones
People Counting
Time to zone summary
Exception report

Lift & Floor Access Control

128 floors support
Unlimited cascading over software
7 Hall-Calling support
Access permission grants to different resident users

Time Attendance

Over-Night shift schedule
Rotation management
Leave management
Over-Time management
T/A Reports